

Fire Stopping Compartmentation Systems

**FLAMOSEAL
ABLATIVE
COATING**



TRIA

FLAMOSEAL ABLATIVE COATING

ETA 20/1242 of 2020/12/20

description

FLAMOSEAL ABLATIVE COATING is a highly advanced flexible coating for use when installing the Flamoseal board System. The FLAMOSEAL ABLATIVE COATING is used to seal in the Flamoseal board to reinstate the fire resistance performance of wall and floor constructions where apertures are penetrated by single or multiple services.

FLAMOSEAL ABLATIVE COATING is tested and Certified as part the Flamoseal Board. The FLAMOSEAL ABLATIVE COATING when used as part of the Flamoseal Board System can be installed across a variety services and substrates including:

- Flexible and Rigid Walls
- Rigid Floors
- Multi-Service penetrations
- Blank Openings
- Head of Walls

intended use

- To reinstate fire resistance through walls and floors
- Prevention of air leakage
- Maintains Acoustic performance
- Assumed working life 30 years
- For internal use

advantages

- Highly flexible, high performance flexible ablative coating, making cutting and install easy
- Simple to install, through spray or brush application.
- Tested practically, with the installer in mind.
- Provides smoke seal.
- Manufactured and tested alongside the entire Flamoseal Board range


certification & testing:

- Tested in accordance with EN1366-3:2009 – Fire Resistance – Penetration Seals
- Classified in accordance with EN13501-2 – Fire Resistance
- CE Marked

Please refer to Flamoseal Board Data Sheet.

product information document overview

PRODUCT TECHNICAL DATA	
Description	Result
Density - ISO 2811-1	1.35g/cm ³
Longevity of Fire Stop Material - ASTM E2923:14	30 Years
Size	20kg
Colour	White
Packaging	Pails
Associated Products	Flamocoustic Sealant, Flamopro Sealant, Flamocol Collar, Flamocol W e Flamocol WEL
Shelf Life	12 months if stored in accordance with storage conditions

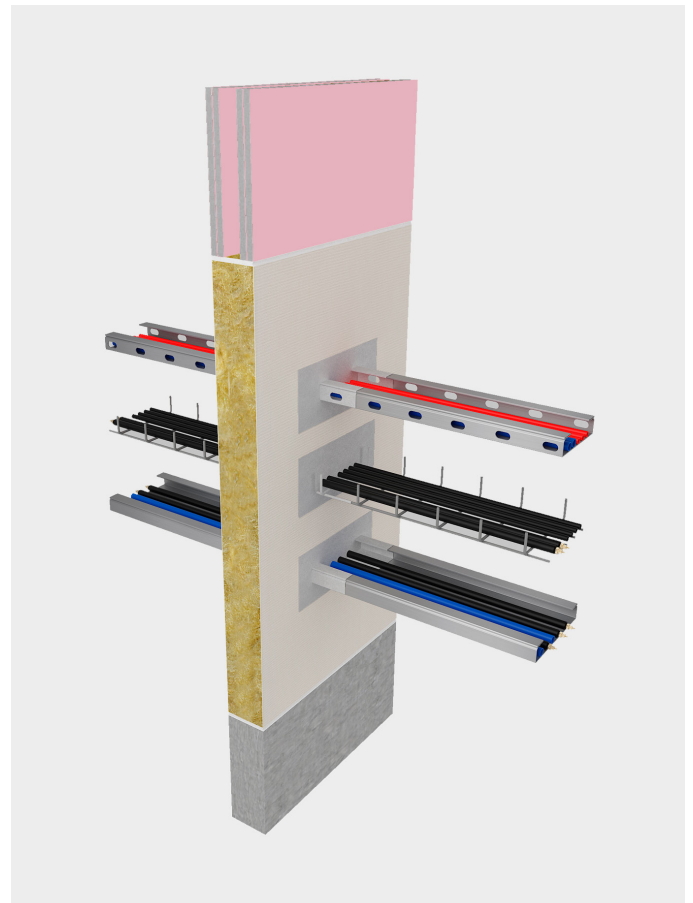

information

TRIA has Technical Representatives who provide assistance in the selection and specification of TRIA products. For more information, specification and technical advice please call our Head Office geral@tria.pt. Guarantee / Warranty: TRIA products are manufactured to rigid standards of quality. Any product which has been applied in accordance with TRIA's written instructions and in any application

recommended by TRIA, but which is proved to be defective in product quality, will be replaced free of charge. No liability can be accepted for the information provided in this document although it is published in good faith and believed to be correct. TRIA reserves the right to alter product specifications without prior notice, in line with our Company policy of continuous development and improvement.

COMPANY OF THE GROUP



TRIA - Serviços, Materiais e Equipamentos, SA.
Parque Ind. Manuel Lourenço Ferreira - Lt.43
3450 - 232 Mortágua
//+351 231 927 480 //geral@tria.pt
www.tria.pt

VER.12.22